


**3-25**  
HORSEPOWER POUNDS

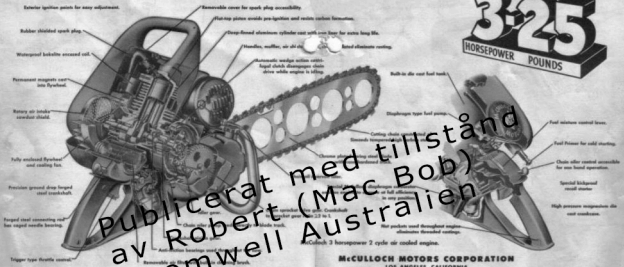

Exterior ignition points for easy adjustment.

Rubber shielded spark plug.

Waterproof bakelite enclosed coil.

Permanent magnets cast into flywheel.

Battery air intake conduct shield.

Fully enclosed flywheel and cooling fan.

Precision ground deep forged steel crankshaft.

Forged steel connecting rod has tapered needle bearings.

Trigger type throttle control.

Removable cover for spark plug accessibility.

Flat-top piston avoids pre-ignition and resists carbon formation.

Deep-finned aluminum cylinder cast with own base for extra long life.

Handles, muffler, air oil dipper, and carburetor all feature aluminum coating.

Automatic wedge action carburetor slush disengages chain drive while engine is idling.

Built-in die cast fuel tank.

Diaphragm type fuel pump.

Cutting chain mounted on stainless steel sprocket.

Chrome plated timing steel.

Grounded carburetor for full efficiency in any position.

Special ground carburetor for full efficiency in any position.

Hot points used throughout engine eliminates threaded castings.

McCulloch 3 horsepower 2 cycle air cooled engine.

Foot rest control lever.

Foot Pressure for cold starting.

Chain oiler control accessible for one hand operation.

Special kickstart recoil starter.

High pressure magnesium die cast crankcase.

Publicerat med tillstånd  
av Robert (Mac Bob)  
Cromwell Australien

**McCULLOCH MOTORS CORPORATION**  
LOS ANGELES, CALIFORNIA

Cutaway View of McCulloch Chain Saw (Model 3-25)